

# Veritas™ Cluster Server Agent for Sybase Installation and Configuration Guide

HP-UX 11i v3

5.0.1



# Veritas Cluster Server Agent for Sybase Installation and Configuration Guide

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Agent version: 5.0

Document version: 5.0.1.0

## Legal Notice

Copyright © 2009 Symantec Corporation. All rights reserved.

Symantec, the Symantec Logo, Veritas and Veritas Storage Foundation are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, "Rights in Commercial Computer Software or Commercial Computer Software Documentation", as applicable, and any successor regulations. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Symantec Corporation  
350 Ellis Street  
Mountain View, CA 94043  
<http://www.symantec.com>

# Technical Support

Symantec Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within Symantec to answer your questions in a timely fashion. For example, the Technical Support group works with Product Engineering and Symantec Security Response to provide alerting services and virus definition updates.

Symantec's maintenance offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers automatic software upgrade protection
- Global support that is available 24 hours a day, 7 days a week
- Advanced features, including Account Management Services

For information about Symantec's Maintenance Programs, you can visit our Web site at the following URL:

[www.symantec.com/techsupp/](http://www.symantec.com/techsupp/)

## Contacting Technical Support

Customers with a current maintenance agreement may access Technical Support information at the following URL:

[www.symantec.com/business/support/assistance\\_care.jsp](http://www.symantec.com/business/support/assistance_care.jsp)

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level
- Hardware information
- Available memory, disk space, and NIC information
- Operating system

- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
  - Error messages and log files
  - Troubleshooting that was performed before contacting Symantec
  - Recent software configuration changes and network changes

## Licensing and registration

If your Symantec product requires registration or a license key, access our technical support Web page at the following URL:

[www.symantec.com/techsupp/](http://www.symantec.com/techsupp/)

## Customer service

Customer service information is available at the following URL:

[www.symantec.com/techsupp/](http://www.symantec.com/techsupp/)

Customer Service is available to assist with the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and maintenance contracts
- Information about the Symantec Buying Programs
- Advice about Symantec's technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs or manuals

## Documentation feedback

Your feedback on product documentation is important to us. Send suggestions for improvements and reports on errors or omissions to [clustering\\_docs@symantec.com](mailto:clustering_docs@symantec.com). Include the title and document version (located on the second page), and chapter and section titles of the text on which you are reporting.

## Maintenance agreement resources

If you want to contact Symantec regarding an existing maintenance agreement, please contact the maintenance agreement administration team for your region as follows:

Asia-Pacific and Japan	<a href="mailto:customercare_apac@symantec.com">customercare_apac@symantec.com</a>
Europe, Middle-East, and Africa	<a href="mailto:semea@symantec.com">semea@symantec.com</a>
North America and Latin America	<a href="mailto:supportsolutions@symantec.com">supportsolutions@symantec.com</a>

## Additional enterprise services

Symantec offers a comprehensive set of services that allow you to maximize your investment in Symantec products and to develop your knowledge, expertise, and global insight, which enable you to manage your business risks proactively.

Enterprise services that are available include the following:

Symantec Early Warning Solutions	These solutions provide early warning of cyber attacks, comprehensive threat analysis, and countermeasures to prevent attacks before they occur.
Managed Security Services	These services remove the burden of managing and monitoring security devices and events, ensuring rapid response to real threats.
Consulting Services	Symantec Consulting Services provide on-site technical expertise from Symantec and its trusted partners. Symantec Consulting Services offer a variety of prepackaged and customizable options that include assessment, design, implementation, monitoring, and management capabilities. Each is focused on establishing and maintaining the integrity and availability of your IT resources.
Educational Services	Educational Services provide a full array of technical training, security education, security certification, and awareness communication programs.

To access more information about Enterprise services, please visit our Web site at the following URL:

[www.symantec.com](http://www.symantec.com)

Select your country or language from the site index.

# Contents

Technical Support .....	4	
Chapter 1	Introducing the Veritas agent for Sybase .....	9
	About the Veritas High Availability Agent for Sybase .....	9
	What's new in this release .....	10
	Supported software .....	10
	How the agent makes Sybase highly available .....	10
	About the Sybase agent functions .....	10
	Sybase agent functions .....	11
	Sybase Bk agent functions .....	11
	Using the IPC Cleanup feature for the Sybase agent .....	12
	Monitoring options for the Sybase agent .....	13
	Typical Sybase configuration in a VCS cluster .....	14
Chapter 2	Installing and configuring Sybase .....	17
	VCS requirements for installing Sybase .....	17
	Sybase installation directory .....	17
	\$SYBASE directory on shared disks .....	18
	Database dbspaces .....	18
	Transparent TCP/IP failover .....	18
	System user for Sybase home directory .....	18
	Language settings for the Sybase agent .....	18
	Configure Sybase for detail monitoring .....	19
	Installing Sybase in a VCS environment .....	21
Chapter 3	Installing, upgrading, and removing the agent for Sybase .....	23
	Before you install or upgrade the agent for Sybase .....	23
	Installing the agent .....	24
	Removing the agent for Sybase .....	25
	Disabling the agent for Sybase .....	26
	Upgrading the agent .....	26

Chapter 4	Configuring VCS service groups for Sybase .....	29
	About configuring service groups for Sybase .....	29
	Before configuring the service group for Sybase .....	29
	Importing the SybaseTypes.cf file .....	30
	Configuring the service groups .....	31
	Configuring the service group from Cluster Manager (Java console) .....	31
	Configuring the service group using the command line .....	33
	Encrypting passwords for Sybase .....	35
	About setting up detail monitoring for the agent .....	35
	Enabling detail monitoring for the agent .....	36
	Disabling detail monitoring for the agent .....	37
Chapter 5	Administering VCS service groups for Sybase .....	39
	About administering service groups for Sybase .....	39
	Bringing the Sybase service group online .....	39
	Taking the Sybase service group offline .....	40
	Switching the Sybase service group .....	40
	Modifying the Sybase service group configuration .....	40
	Viewing the agent log for Sybase .....	41
Appendix A	Resource type definitions for Sybase .....	43
	About the resource type and attribute definitions for Sybase .....	43
	Sybase resource type .....	43
	Type definition for the Sybase agent .....	44
	Attribute definitions for the Sybase agent .....	44
	SybaseBk resource type .....	47
	Type definition for the SybaseBk agent .....	47
	Attribute definitions for the SybaseBk agent .....	47
Appendix B	Sample configurations for Sybase .....	49
	About the sample configuration for the Sybase agent .....	49
	Resource dependency graph for the Sybase agent .....	49
	Sample configuration for a Sybase service group using LVM on HP-UX systems .....	50
	Sample configuration for a Sybase service group using VxVM on HP-UX systems .....	52
Index	.....	57



# Introducing the Veritas agent for Sybase

This chapter includes the following topics:

- [About the Veritas High Availability Agent for Sybase](#)
- [What's new in this release](#)
- [Supported software](#)
- [How the agent makes Sybase highly available](#)
- [About the Sybase agent functions](#)
- [Monitoring options for the Sybase agent](#)
- [Typical Sybase configuration in a VCS cluster](#)

## About the Veritas High Availability Agent for Sybase

The Veritas High Availability Agent for Sybase brings the configured Sybase servers online, monitors them, and takes them offline.

The package contains the following agents:

- Agent for SQL Server- Sybase
- Agent for Backup Server- SybaseBk

The agents include type declarations and agent executables, and are represented with Sybase and SybaseBk resource types, respectively. Both agents work together to make Sybase highly available in a VCS cluster.

---

**Note:** Veritas agent for Sybase provides "active/passive" support for Sybase. For "active/active" support, contact Sybase for their agent.

---

## What's new in this release

The Sybase agent supports the IPC cleanup feature.

## Supported software

The Veritas agent for Sybase supports the following software versions:

Sybase	Sybase Adaptive Server Enterprise (ASE) 12.5.x and 15.x
Veritas Cluster Server	VCS 5.0.1 on HP-UX
HP-UX	HP-UX 11i v3.0

## How the agent makes Sybase highly available

The agent for Sybase can perform different levels of monitoring and different actions which you can configure. In the basic monitoring mode, the agent detects an application failure if a configured Sybase server process is not running. In the optional detail monitoring mode, the agent detects application failure if it cannot perform a transaction in the test table in the Sybase database server.

When the agent detects that the configured Sybase server is not running on a system, the Sybase service group is failed over to the next available system in the service group's SystemList. The configured Sybase servers are started on the new system, thus ensuring high availability for the Sybase server and data.

## About the Sybase agent functions

The functions an agent performs are called entry points. The Veritas agent for Sybase can perform different operations or functions on the database. These functions are online, offline, monitor, and clean.

Review the functions for the following agents that are part of the Veritas Cluster Server agent suite for Sybase:

- Sybase (SQL server) agent functions  
See "[Sybase agent functions](#)" on page 11.
- Sybase Bk (Backup Server) agent functions

See “[Sybase Bk agent functions](#)” on page 11.

## Sybase agent functions

The agent for Sybase starts a Sybase SQL server, monitors the server processes, and shuts down the server.

[Table 1-1](#) lists the Sybase agent for SQL server functions.

**Table 1-1** Sybase agent for SQL server functions

Agent function	Description
Online	Starts the Sybase SQL server by using the following command.  <pre>startserver -f \$SYBASE/\$SYBASE_ASE/install/RUN_\$Server</pre>
Monitor	In the basic monitoring mode, the agent scans process table for the <code>dataserver</code> process. In detail monitoring mode, the agent runs the script that is specified in <code>Monscript</code> as an option.  See “ <a href="#">Monitoring options for the Sybase agent</a> ” on page 13.
Offline	Stops the Sybase SQL server by using the <code>isql</code> command in the following manner.  The agent first executes the <code>shutdown with wait</code> command. If this command fails, the offline script executes the <code>shutdown with nowait</code> command.
Clean	Forcefully stops the Sybase SQL server by using the <code>isql</code> command in the following manner.  The agent first executes the <code>shutdown with wait</code> command. If this command fails, the clean script executes the <code>shutdown with nowait</code> command.  If the process does not respond to the <code>shutdown</code> command, the agent scans the process table for the processes that are associated with the configured database and kills them.

## Sybase Bk agent functions

The agent for SybaseBk starts a Sybase Backup server, monitors the server process, and shuts down the server.

[Table 1-2](#) lists the Sybase agent for Backup server functions.

**Table 1-2** Sybase agent for Backup server functions

Agent operation	Description
Online	<p>Starts the Sybase Backup server by using the following command.</p> <pre>startserver -f \$\$SYBASE/\$\$SYBASE_ASE/ install/RUN_\$BackupServer</pre>
Monitor	<p>Scans the process table for the backupserver process.</p>
Offline	<p>Stops the Sybase Backup server by using the <code>isql</code> command in the following manner.</p> <p>The agent first executes the command <code>shutdown SYB_BACKUP with wait</code>. If this command fails, the offline script executes <code>shutdown SYB_BACKUP with nowait</code>.</p>
Clean	<p>Forcefully stops the Sybase Backup server by using the <code>isql</code> command in the following manner.</p> <p>The agent first executes the command <code>shutdown SYB_BACKUP with wait</code>. If this command fails, the clean script executes <code>shutdown SYB_BACKUP with nowait</code>.</p> <p>If the process does not respond to the <code>shutdown</code> command, the agent scans the process table for the processes that are associated with the configured Sybase Backup server and kills them.</p>

## Using the IPC Cleanup feature for the Sybase agent

When the Adaptive Server starts, it creates shared memory files in `$$SYBASE` to store information about the shared memory segments that it uses. Adaptive Server start-up parameter `-M` can be used to change the location of directory that stores shared memory files. The start-up parameter `-M` should be updated in `RUN_$Server` file.

If the Sybase home directory is unmounted, the Sybase clean script cannot access the shared memory files and does not clean the IPC resources that are allocated by the Sybase processes. Hence, the agent requires shared memory files to be present in the following directory on local system `/var/tmp/sybase_shm/$Server`.

In the `$$SYBASE/$$SYBASE_ASE/install` directory, edit the `RUN_$Server` file. Change the location of the directory that stores shared memory files to `/var/tmp/sybase_shm/$Server` using the `-M` option.

For example, the file `RUN_Sybase_Server` resembles the following before the change:

```
/home/sybase/ASE-15_0/bin/dataserver \  
  
-sSybase_Server \  
  
-d/home/sybase/data/master.dat \  
  
-e/home/sybase/ASE-15_0/install/Sybase_Server.log \  
  
-c/home/sybase/ASE-15_0/Sybase_Server.cfg \  
  
-M/home/sybase/ASE-15_0 \  

```

After the replacement, the file resembles:

```
/home/sybase/ASE-15_0/bin/dataserver \  
  
-sSybase_Server \  
  
-d/home/sybase/data/master.dat \  
  
-e/home/sybase/ASE-15_0/install/Sybase_Server.log \  
  
-c/home/sybase/ASE-15_0/Sybase_Server.cfg \  
  
-M/var/tmp/sybase_shm/Sybase_Server \  

```

Here Sybase\_Server is the Adaptive server name.

---

**Note:** Make sure you create the /var/tmp/sybase\_shm/Sybase\_Server directory with proper permissions.

---

## Monitoring options for the Sybase agent

The Veritas agent for Sybase provides two levels of application monitoring: basic and detail.

In the basic monitoring mode, the agent for Sybase monitors the Sybase daemon processes to verify whether they are running.

In the detail monitoring mode, the agent performs a transaction on a test table in the database to ensure that Sybase functions properly. The agent uses this test

table for internal purposes. Symantec recommends that you do not perform any other transaction on the test table.

See “[About setting up detail monitoring for the agent](#)” on page 35.


When the agent detects that the configured Sybase server is not running on a system, the Sybase service group is failed over to the next available system in the service group’s SystemList. The configured Sybase servers are started on the new system, thus ensuring high availability for the Sybase server and data.

## Typical Sybase configuration in a VCS cluster

In a typical configuration, VCS is configured in a two node cluster. The Sybase data is installed on shared disks. The Sybase server binaries can be installed locally on both nodes or on shared disks. The agent for Sybase is installed on both nodes. The shared disks can be managed using Symantec Volume Manager (VxVM).


[Figure 1-1](#) illustrates a sample configuration in which the Sybase servers, including binaries and data are installed completely on shared disks or shared cluster disk groups managed using VxVM.

**Figure 1-1** Sybase binaries and data on shared disks

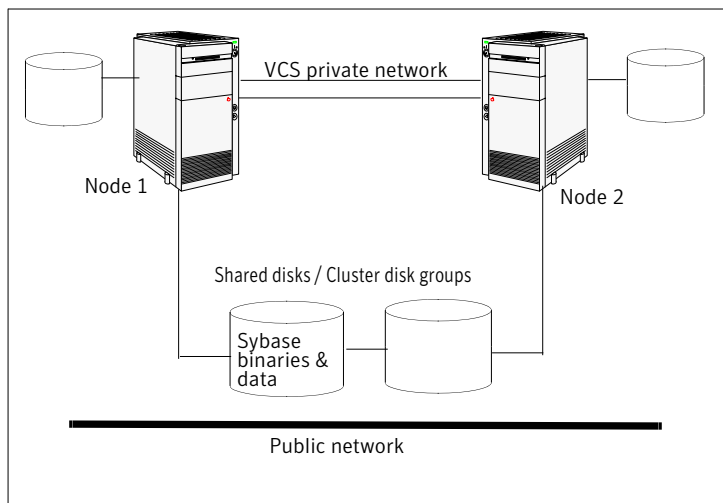

[Figure 1-2](#) illustrates a sample configuration in which Sybase binaries are installed locally on each node in the cluster and the Sybase data is on shared disks or shared cluster disk groups managed using VxVM.

Figure 1-2 Binaries on local disk and Sybase data on shared disks

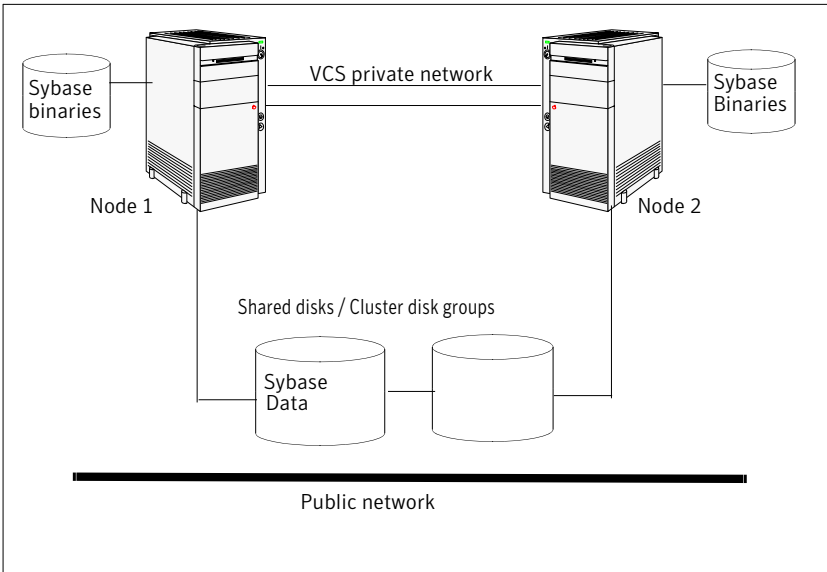





# Installing and configuring Sybase

This chapter includes the following topics:

- [VCS requirements for installing Sybase](#)
- [Configure Sybase for detail monitoring](#)
- [Installing Sybase in a VCS environment](#)

## VCS requirements for installing Sybase

Review the following requirements before you install Sybase in a VCS cluster. Before installing Sybase, make sure that the systems in the cluster have adequate resources to run Sybase and VCS.

### Sybase installation directory

The Sybase installation directory can be located on a local disk or a shared storage.

Review the following prerequisites:

- If the Sybase binaries are installed on a local disk, verify that the installation path is same on all the nodes in the cluster. Make sure the Sybase configuration files are identical on all the nodes in the cluster.
- If the Sybase binaries are installed on shared disks, make sure the mount points for the shared disks are same on all the nodes. The Sybase installation directory is specified by the environment variable \$SYBASE. Create the same \$SYBASE mount points on each system.

## \$SYBASE directory on shared disks

All database devices, including master devices, sybssystemprocs, and information about Sybase user must be located on shared disks. If the database devices are created on file systems, the file systems must also be located on shared disks. Create the same file system mount points on each system to access the shared disks.

## Database dbspaces

If you use shared disks for dbspaces, change the permissions, or access mode on the disk groups that store the Sybase data. Change the permissions for sybase to 660.

For example, if you use Veritas Volume Manager, type

```
# vxedit -g diskgroup_name set group= dba\  
user=sybase mode=660 volume_name
```

## Transparent TCP/IP failover

For Sybase server failover to be transparent to Sybase clients, create an IP address as part of the Sybase service group. This IP address must match the dataserver and backup server entries in the \$SYBASE/interfaces file. For information on the format for adding entries to the \$SYBASE/interfaces file, refer to the Sybase documentation.

## System user for Sybase home directory

Make sure you have a system user, with the same username and ID, on all cluster nodes. Also, the system user should have the ownership of the Sybase home directory on the shared disk. Type the following commands:

```
# useradd -u user_id user_name  
# chown -R user_name $SYBASE
```

## Language settings for the Sybase agent

For the Veritas agent for Sybase to function with the desired locale, make sure that the Sybase installation has the correct localization files. For example, if the Sybase server requires 'LANG=en\_US.UTF-8' environment variable, verify that the localization files corresponding to language 'en\_US.UTF-8' are installed with Sybase. Also, edit the file \$VCS\_HOME/bin/vcsenv to contain the following:

```
LANG=en_US.UTF-8;export LANG
```

This change affects all the agents that are configured on the nodes.

## Configure Sybase for detail monitoring

This section describes the tasks to be performed to configure a Sybase server for detail monitoring.

See “[About setting up detail monitoring for the agent](#)” on page 35.

---

**Note:** The steps that are described here are specific to the sample script, `SqlTest.pl`, provided with the agent. If you use a custom script for detail monitoring, you must configure the Sybase database accordingly.

---

Perform these steps only once in a Sybase cluster.

### To configure Sybase for detail monitoring

- 1 Source the `SYBASE.sh` file or `SYBASE.csh` file (depending on the user shell) to set the `$SYBASE` and `$SYBASE_ASE` environment variables.

- 2 Start the Sybase server.

```
# $SYBASE/$SYBASE_ASE/install/RUN_server_name
```

- 3 Start the Sybase client on any cluster node.

```
# isql -Usa
```

Enter the administrator password when prompted to do so.

- 4 Connect to the master database.

```
# use master  
# go
```

- 5 Create a Sybase user account.

```
# sp_addlogin user_name, password  
# go
```

The detail monitor script should use this account to make transactions on the database.

**6** Create a database.

```
# create database database_name
# go
```

The detail monitor script should make transactions on this database.

**7** If required, restrict the size of the log file for the database.

```
# sp_dboption database_name, " log on chkpt", true
# go
```

**8** Connect to the database that is created in step 6.

```
# use database_name
# go
```

**9** Associate the user created in step 5 with the database created in step 6.

```
# sp_adduser user_name
# go
```

**10** Change the user to the one created in step 5.

```
# setuser user_name
# go
```

**11** Create a table in the database.

```
# create table table_name (lastupd datetime)
# go
```

The detail monitor script should make transactions on this table.

If you use the SqlTest.pl for detail monitoring, make sure you create a table with a lastupd field of type datetime.

**12** Verify the configuration by adding an initial value to the table.

```
# insert into table_name (lastupd) values (getdate())
# go
```

**13** Exit the database.

```
# exit
```

# Installing Sybase in a VCS environment

For information on how to install Sybase, refer to Sybase documentation.



# Installing, upgrading, and removing the agent for Sybase

This chapter includes the following topics:

- [Before you install or upgrade the agent for Sybase](#)
- [Installing the agent](#)
- [Removing the agent for Sybase](#)
- [Disabling the agent for Sybase](#)
- [Upgrading the agent](#)

## Before you install or upgrade the agent for Sybase

Ensure that you meet the following prerequisites to install the Veritas agent for Sybase:

- Verify that VCS is installed and configured. Symantec recommends installing the VCS graphical user interface. If required, review the *Veritas Cluster Server Installation Guide*.
- Verify that Sybase is installed and configured on all cluster nodes on which you will install the agent. Review the Sybase documentation for more information.

See [“VCS requirements for installing Sybase”](#) on page 17.

- Verify that the sybase account is valid and identical on all cluster systems that will run Sybase. Verify that the sybase user account has permissions to execute Sybase binaries.  
See “[System user for Sybase home directory](#)” on page 18.

## Installing the agent

You can install the Veritas Cluster Server agent for Sybase from the product disc. Install the agent for Sybase on each node in the cluster.

### To install the agent on HP-UX systems

- 1 Insert the software disc into the system's disc drive.
- 2 Log in as superuser.
- 3 Set the display permission on your workstation.

```
# xhost +myws
```

- 4 Configure the shell environment variable DISPLAY on your workstation. For example, if your workstation has the name "myws." type

For Bourne or Korn shell (sh or ksh)

```
DISPLAY=myws:0.0  
export DISPLAY
```

For C shell (csh or tcsh)

```
setenv DISPLAY=myws:0.0
```

Setting the DISPLAY environment variable this way enables you to use the SD-UX graphical interface.

- 5 Create a mount point directory, /cdrom, if it does not exist. The directory must have read-write permissions.
- 6 Determine the block device file for the disk drive. The device file should have the form /dev/dsk/c#t#d#. Type the following:

```
# ioscan -fnC disk
```



- 7 Mount the CD. For example, to mount the CD to the mount point /cdrom, type

```
# mkdir /cdrom  
  
# mount /dev/dsk/clt2d0 /cdrom
```

where /dev/dsk/clt2d0 is the drive's block device file.

- 8 Type the following command to install the agent:

```
# cd /cdrom/depot/  
  
# swinstall -s `pwd` VRTSvcssy
```

Repeat step 1 through step 8 on all nodes that are part of the Sybase service group.

- 9 Copy the file SybaseTypes.cf from /etc/VRTSagents/ha/conf/Sybase/ directory to /etc/VRTSvcs/conf/config directory.

## Removing the agent for Sybase

This section provides steps to remove the agent from the cluster.

### To remove the agent

- 1 Take the Sybase and SybaseBk resources offline.
- 2 Stop the agent for Sybase.

```
# haagent -stop Sybase -sys system name
```

Perform this step on all nodes on which the agent for Sybase is running.

- 3 Stop the agent for SybaseBk.

```
# haagent -stop SybaseBk -sys system name
```

Perform this step on all nodes on which the agent for SybaseBk is running.

- 4 Type the following command to remove the agent from all nodes in the cluster. Answer prompts accordingly.

```
■ # swremove VRTSvcssy
```

## Disabling the agent for Sybase

To disable the agent on a system, you must first change the Sybase service group to an OFFLINE state. You can stop the application completely, or switch the service group to another system.

### To disable the agent

- 1 Determine if the service group is online. At the prompt, type:

```
# hagrps -state service_group -sys system_name
```

- 2 If the service group is online, take it offline. At the prompt, type:

```
# hagrps -switch service_group -to system_name
```

Or

```
# hagrps -offline service_group -sys system_name
```

- 3 Stop the agent on the system. At the prompt, type:

```
# haagent -stop Sybase -sys system_name
```

```
# haagent -stop SybaseBk -sys system_name
```

- 4 When you get the message "Please look for messages in the log file," check the file `/var/VRTSvcs/log/engine_A.log` for a message confirming the agent has stopped.

You can also use the `ps` command to verify that the agent has stopped.

- 5 When the agent has stopped, you can remove the system, the service group, or the resource type from the VCS configuration.

For more information, refer to the chapter on reconfiguring VCS from the command line in *Veritas Cluster Server User's Guide*.

## Upgrading the agent

This section describes the procedure to upgrade the Veritas agent for Sybase in a VCS cluster. Perform the following procedure on each node of the VCS cluster.

**To upgrade the VCS agent 3.5 or 4.1 on HP-UX systems**

- 1 Save the VCS configuration and stop the VCS engine.

```
# haconf -dump -makero  
# hastop -all -force
```

- 2 Back up the configuration file, main.cf to a location on the cluster node.
- 3 Perform the following steps on all systems that have the agent for Sybase installed.
  - Remove the agent for Sybase.

```
# swremove VRTSvcssy
```

- Delete the file /etc/VRTSvcs/conf/config/SybaseTypes.cf.
  - Install the Veritas High Availability Agent for Sybase.  
See [“Installing the agent”](#) on page 24.
- 4 Make sure that you have copied the SybaseTypes.cf file from the /etc/VRTSagents/ha/conf/Sybase/ directory to /etc/VRTSvcs/conf/config directory.

Make sure to update the newly copied SybaseTypes.cf file with all the type-level changes that you had made to the older SybaseTypes.cf file.

For example, if you had changed the value of the MonitorInterval attribute from the default 60 to 120 seconds, the SybaseTypes.cf file gets updated. You must apply these type-level changes manually to the newly copied SybaseTypes.cf file.

- 5 Copy the main.cf from the backed up location to /etc/VRTSvcs/conf/config directory.
- 6 Edit the main.cf file located under /etc/VRTSvcs/conf/config.  
Perform this step only while upgrading the Veritas agent for Sybase from 3.5 to 5.0.

- If you configured detail monitoring, make sure the Monscrip attribute of the Sybase resource type is configured properly.
- Remove the Monscrip attribute for the SybaseBk resource type, if configured.
- Replace the password specified for the SApwd attribute (of Sybase and SybaseBk resources) and UPword attribute (of Sybase resource) with encrypted passwords.

- Save the main.cf file.

**7** Verify the configuration.

```
# cd /etc/VRTSvcs/conf/config  
# hacf -verify config
```

**8** Start VCS on the local node.

**9** Start VCS on other nodes.

# Configuring VCS service groups for Sybase

This chapter includes the following topics:

- [About configuring service groups for Sybase](#)
- [Before configuring the service group for Sybase](#)
- [Configuring the service groups](#)
- [Configuring the service group from Cluster Manager \(Java console\)](#)
- [Configuring the service group using the command line](#)
- [Encrypting passwords for Sybase](#)
- [About setting up detail monitoring for the agent](#)

## About configuring service groups for Sybase

Configuring the Sybase service group involves configuring service group resources and defining attribute values for the configured resources. You must have administrator privileges to create and configure a service group. Before you configure the agent, review the Sybase resource types and their attributes.

## Before configuring the service group for Sybase

Before you configure the Sybase service group, you must meet the following prerequisites:

- Verify that VCS is installed and configured on all nodes in the cluster where you plan to configure the service group. For more information on installing VCS:  
See the *Veritas Cluster Server Installation Guide*.
- Verify that Sybase is installed and configured identically on all nodes in the cluster.  
See “[VCS requirements for installing Sybase](#)” on page 17.
- Verify that the Veritas agent for Sybase is installed on all nodes in the cluster.  
See “[Installing the agent](#)” on page 24.
- Verify the type definition for Veritas agent for Sybase is imported into the VCS engine.  
See “[Importing the SybaseTypes.cf file](#)” on page 30.

## Importing the SybaseTypes.cf file

Before you configure the Sybase service group, you must import the SybaseTypes.cf file to the VCS engine.

### To import the SybaseTypes.cf file using the Cluster Manager

- 1 On one of the nodes in the cluster, start the Cluster Manager (Java Console).  
Type:

```
# haGUI&
```

- 2 Log in to the cluster and wait for the Cluster Explorer to launch.
- 3 From the **File** menu select **Import Types**. Switch to the read/write mode if prompted.
- 4 In the Import Types dialog box, select the file:

```
/etc/VRTSvcs/conf/config/SybaseTypes.cf
```

- 5 Click **Import** and wait for the file to import.
- 6 Save the configuration.

### To import the SybaseTypes.cf file using the command line

- 1 Log in to a cluster system as superuser.
- 2 Make the cluster configuration as read-only. This action ensures that all changes to the existing configuration have been saved and further changes are prevented while you modify main.cf:

```
# haconf -dump -makero
```

- 3 To ensure that VCS is not running while you edit `main.cf`, issue the following command to stop the VCS engine on all systems. Leave the resources that are available online.

```
# hastop -all -force
```

- 4 Make a backup copy of the `main.cf` file.

```
# cd /etc/VRTSvcs/conf/config
# cp main.cf main.cf.orig
```

- 5 Edit the `main.cf` file to include the `SybaseTypes.cf` file.

```
# include "SybaseTypes.cf"
```

The Sybase types definition is imported to the VCS engine. The agent for Sybase can be configured without interrupting or stopping VCS.

## Configuring the service groups

You can configure the service groups for Sybase using the following methods:

- By using VCS Cluster Manager (Java Console) to edit a resource group template for the agent.  
See [“Configuring the service group from Cluster Manager \(Java console\)”](#) on page 31.
- By using the types configuration files and directly editing the sample `main.cf` file supplied with the agent. This method requires you to restart VCS before the configuration takes effect.

## Configuring the service group from Cluster Manager (Java console)

A template for the Sybase resource groups is automatically installed with the Veritas agent for Sybase. Using the VCS cluster Manager (Java console), you can view the template, which displays the Sybase service group, its resources and their attributes. You can dynamically modify the attributes' values as necessary for your configuration.

### To configure a service group from the Java console

- 1 Make sure that the Sybase type definition file SybaseTypes.cf is imported in your configuration.  
See “[Configuring the service groups](#)” on page 31.
- 2 Launch the Cluster Configuration wizard using any of the following ways:
  - From the Cluster Explorer menu, select **Tools > Configuration Wizard**.
  - If no service groups exist on the system, Cluster Explorer prompts you to launch the Cluster Configuration wizard. Click **Yes** when prompted.The Loading Templates Information window appears, and launches the wizard.
- 3 Review the information in the Welcome dialog box and click **Next**.
- 4 Specify the name of the service group and the target systems on which the service group is configured.
  - Enter the name of the service group.
  - From the **Available Systems** box, select the systems on which to configure the service group.
  - Click the right arrow to move the selected systems to the **Systems for Service Group** box. To remove a system from the box, select the system and click the left arrow.
  - Specify system priority for the service group to failover. System priority is numbered sequentially, with the lowest assigned number denoting the highest priority.
  - Select the **Service Group Type** as Failover and click **Next**.
- 5 On the **Would you like to use a template to configure the service group?** dialog box, click **Next** to configure the service group using a template.
- 6 Select the **SybaseGroup** template to configure a Sybase service group.  
If applicable, a window opens notifying that names of some resources within the new service group are already in use. Resolve the name clashes, if any and click **Next**.
- 7 Click **Next** to create the service group that is based on the selected template.  
A progress indicator displays the percentage of the commands that are executed to create the service group. The actual commands are displayed at the top of the indicator.



- 8 After the service group is created, click **Next** to edit the attributes for the resources.

The left pane in the dialog box lists all the resources for the Sybase service group. Select a resource from the left pane to list the attributes on the right pane. The attributes in bold denote mandatory attributes. You can modify the attribute values as given in the procedure that follows .

- 9 Click **Finish** to accept the default values and complete the configuration.

#### To edit the Sybase service group resource attributes

- 1 Select the resource from the list on the left pane. The resource attributes appear in the right pane.
- 2 Select the attribute to be modified and click the edit icon in the **Edit** column.
- 3 In the Edit Attribute dialog box, enter the attribute values. To modify the scope of the attribute, choose the **Global** or **Local** option.
- 4 Click **OK**.
- 5 Repeat the procedure for each resource and click **Finish**. Edit the attributes for all the resources according to your configuration.
- 6 Follow the wizard instructions to complete the configuration. Click **Finish** to quit the wizard.

---

**Caution:** For added security, you must always provide a secure value for passwords.

---

See [“Encrypting passwords for Sybase”](#) on page 35.

## Configuring the service group using the command line

The Veritas agent for Sybase contains a sample configuration file that can be used as reference to directly modify your present configuration file. This method requires you to restart VCS before the configuration takes effect.

#### To configure a service group from the command line

- 1 Log in to a cluster system as superuser.
- 2 Make sure the Sybase type definition is imported into VCS engine.

See [“Configuring the service groups”](#) on page 31.

- 3 Edit the main.cf file. Use the file `/etc/VRTSagents/ha/conf/Sybase/sample_main.cf` for reference.
  - Create a Sybase service group.
  - Create the Sybase and SybaseBk resources.  
See “[Sybase resource type](#)” on page 43.  
See “[SybaseBk resource type](#)” on page 47.
  - Edit the default attributes to match the parameters in your configuration.  
For added security, you must always provide a secure value for passwords.  
See “[Encrypting passwords for Sybase](#)” on page 35.
  - Assign dependencies to the newly created resources. Refer to the sample file `/etc/VRTSagents/ha/conf/Sybase/sample_main.cf`. See the *Veritas Cluster Server User’s Guide* for more information on assigning dependencies.

4 Save and close the file.

5 Verify the syntax of the file `/etc/VRTSvcs/conf/config/main.cf`.

```
# hacf -verify config
```

6 Start VCS on local node.

```
# hastart
```

7 Start VCS on other nodes.

8 Verify that all Sybase service group resources are brought online.

```
# hagrps -state
```

9 Take the service group offline and verify that all resources are stopped.

```
# hagrps -offline service_group -sys system_name
```

```
# hagrps -state
```

10 Bring the service group online again and verify that all resources are available.

```
# hagrps -online service_group -sys system_name
```

```
# hagrps -state
```

11 Start the VCS engine on the other node.

```
# hastart
```

- 12 Switch the Sybase service group to the other node.

```
# hagrps -switch service_group -to system_name
```

- 13 Verify that all Sybase service group resources are brought online on the other node.

```
# hagrps -state
```

- 14 On all systems, look at the following log files for any errors or status.

```
/var/VRTSvcs/log/engine_A.log  
/var/VRTSvcs/log/Sybase_A.log  
/var/VRTSvcs/log/SybaseBk_A.log
```

## Encrypting passwords for Sybase

VCS provides a `vcscrypt` utility to encrypt user passwords. Encrypt passwords before specifying them for Sybase and SybaseBk resource type definition.

### To encrypt passwords

- 1 From the path `$VCS_HOME/bin/`, run the `vcscrypt` utility.
- 2 Type the following command.

```
# vcscrypt -agent
```

The utility prompts you to enter the password twice. Enter the password and press Return.

```
Enter New Password:  
Enter Again:
```

- 3 The utility encrypts the password and displays the encrypted password.
- 4 Enter this encrypted password as the value for the attribute.  
Copy the encrypted password for future reference.

## About setting up detail monitoring for the agent

The Veritas agent for Sybase provides two levels of application monitoring: basic and detail. In basic monitoring, Sybase resource monitors the Sybase daemon processes to verify that they are continuously active.

In detail monitoring, the Sybase resource performs transactions on a test table in the database to ensure that the Sybase server functions properly. The agent uses this test table for internal purposes. Symantec recommends that you do not perform any other transaction on the test table. The agent uses the script that is defined in the attribute `Monscript` of the Sybase resource. During detail monitoring, the agent executes the specified script. If the script successfully executes, the agent considers the database available. You can customize the default script according to your configurations.

To activate detail monitoring, the `DetailMonitor` attribute must be set to a positive integer and `User`, `UPword`, `Db`, and `Table` attributes must not be empty (""). The attribute `Monscript`, which contains the path of the detail monitor script, must also exist and must have execute permissions for the root.

## Enabling detail monitoring for the agent

Perform the following steps to enable detail monitoring on a database.

### To enable detail monitoring

- 1 Make sure Sybase server is configured for detail monitoring.

See [“Configure Sybase for detail monitoring”](#) on page 19.

- 2 Make the VCS configuration writable.

```
# haconf -makerw
```

- 3 Enable detail monitoring for Sybase.

```
# hares -modify Sybase_resource DetailMonitor 1
# hares -modify Sybase_resource User user
# hares -modify Sybase_resource UPword encrypted password
# hares -modify Sybase_resource Db database_name
# hares -modify Sybase_resource Table table_name
# hares -modify Sybase_resource Monscript
"/opt/VRTSagents/ha/bin/Sybase/SqlTest.pl"
```

- 4 Save the configuration.

```
# haconf -dump [-makeoro]
```

---

**Note:** If detail monitoring is configured and the database is full, the SQL queries take considerable time to commit the results. In such a case, the monitor routine for the agent fails and attempts to fail over the service group. This issue is not encountered if detail monitoring is not configured.

---

## Disabling detail monitoring for the agent

Perform the following steps to disable detail monitoring.

### To disable detail monitoring

- 1 Make the VCS configuration writable.

```
# haconf -makerw
```

- 2 Disable detail monitoring for Sybase.

```
# hares -modify Sybase_resource DetailMonitor 0
```

- 3 Save the configuration.

```
# haconf -dump [-makeo]
```



# Administering VCS service groups for Sybase

This chapter includes the following topics:

- [About administering service groups for Sybase](#)
- [Bringing the Sybase service group online](#)
- [Taking the Sybase service group offline](#)
- [Switching the Sybase service group](#)
- [Modifying the Sybase service group configuration](#)
- [Viewing the agent log for Sybase](#)

## About administering service groups for Sybase

You can administer service groups with the Cluster Manager (Java Console), the Veritas Cluster Server Management Console, or from the command line. The following procedures use the Cluster Manager (Java Console).

## Bringing the Sybase service group online

Perform the following steps to bring a service group online. Note that in the initial few cycles of bringing a service group online, the memory usage by the agent can spike.

#### To bring a service group online

- 1 From Cluster Explorer, click the **Service Groups** tab in the configuration tree.
- 2 Right-click the service group and click **Enable Resources** to enable all the resources in this group.
- 3 Right-click the service group, hover over **Enable**, and select either the node or all the nodes where you want to enable the service group.
- 4 Save and close the configuration. Click **File > Save Configuration**, then **Close Configuration**.
- 5 Right-click the service group, pause over **Online**, and select the system where you want to bring the service group online.

## Taking the Sybase service group offline

Perform the following procedure from Cluster Manager (Java Console) to take the service group offline. Note that in the initial few cycles of taking a service group offline, the agent's memory usage can spike.

#### To take a service group offline

- 1 In the Cluster Explorer configuration tree with the Service Groups tab selected, right-click the service group that you want to take offline.
- 2 Choose **Offline**, and select the appropriate system from the pop-up menu.

## Switching the Sybase service group

The process of switching a service group involves taking it offline on its current system and bringing it online on another system. Perform the following procedure from Cluster Manager (Java Console) to switch the service group.

#### To switch a service group

- 1 In the Cluster Explorer configuration tree with the Service Groups tab selected, right-click the service group.
- 2 Choose **Switch To**, and select the appropriate system from the pop-up menu.

## Modifying the Sybase service group configuration

You can dynamically modify the Sybase agent using several methods, including the Cluster Manager (Java Console), Cluster Manager (Web Console), Veritas Cluster Management Console, and the command line.



See the *Veritas Cluster Server User's Guide* for more information.

## Viewing the agent log for Sybase

The Veritas agent for Sybase logs messages to the following files:

`/var/VRTSvcs/log/engine_A.log`

`/var/VRTSvcs/log/Sybase_A.log`

`/var/VRTSvcs/log/SybaseBk_A.log`



# Resource type definitions for Sybase

This appendix includes the following topics:

- [About the resource type and attribute definitions for Sybase](#)
- [Sybase resource type](#)
- [SybaseBk resource type](#)

## About the resource type and attribute definitions for Sybase

The resource type represents the VCS configuration definition of the agent. It also specifies how the the configuration file, main.cf, defines the agent. Configuring the agent involves assigning values to the resource type attributes.

For the resource type attributes:

See “[Attribute definitions for the Sybase agent](#)” on page 44.

See “[Attribute definitions for the SybaseBk agent](#)” on page 47.

For the sample main.cf configuration files:

## Sybase resource type

The type definitions and attribute definitions for the Sybase resource type are described as follows.

## Type definition for the Sybase agent

The resource type definition for the agent for Sybase is as follows.

HP-UX

```
type Sybase (  
    static str AgentDirectory = "/opt/VRTSagents/ha/bin/Sybase"  
    static str ArgList[] = { Server, Owner, Home, Version, SA,  
                            SApswd, User, UPword, Db, Table,  
                            Monscript, DetailMonitor }  
  
    str Server  
    str Owner  
    str Home  
    str Version  
    str SA  
    str SApswd  
    int DetailMonitor = 0  
    str User  
    str UPword  
    str Db  
    str Table  
    str Monscript="/opt/VRTSagents/ha/bin/Sybase/SqlTest.pl"  
)
```

## Attribute definitions for the Sybase agent

The Sybase resource has several required and optional attributes.

[Table A-1](#) lists the required attributes.

**Table A-1** Required attributes

Required Attributes	Definition
Server	The \$DSQUERY ASE name. Only one server must be configured in a Sybase service group. Type and dimension: string-scalar

**Table A-1** Required attributes (*continued*)

Required Attributes	Definition
Owner	<p>Sybase user as the defined owner of executables and database files in any of the sources (such as NIS+, /etc/hosts, and so on) specified in the /etc/nsswitch.conf file for passwd entry. The Sybase executables and database files are accessed in the context of this user.</p> <p>Type and dimension: string-scalar</p> <p>See “<a href="#">System user for Sybase home directory</a>” on page 18.</p>
Home	<p>The \$SYBASE path to Sybase binaries and configuration files.</p> <p>Type and dimension: string-scalar</p>
Version	<p>Version of Sybase ASE.</p> <p>Type and dimension: string-scalar</p>
SA	<p>Sybase database administrator. This attribute is required to connect to the ASE for shutdown.</p> <p>Type and dimension: string-scalar</p>
SAPswd	<p>Encrypted password for Sybase database administrator. This password is required to connect to the ASE for shutdown.</p> <p>Type and dimension: string-scalar</p> <p>See “<a href="#">Encrypting passwords for Sybase</a>” on page 35.</p> <p><b>Note:</b> You need not specify a value for this attribute if the SA user does not require a password.</p>

[Table A-2](#) lists the optional attributes.

**Table A-2** Optional attributes

Optional Attributes	Definition
AgentDirectory	<p>This attribute is for internal use only.</p> <p>Specifies the location of the binaries, scripts, and other files related to the agent for Sybase. Symantec recommends not to modify the value of this attribute.</p> <p>Type and dimension: static-string</p>

**Table A-2** Optional attributes (*continued*)

Optional Attributes	Definition
DetailMonitor	<p>Specifies whether the Sybase server is monitored in detail. Value 1 indicates that the resource monitors the Sybase server in detail. Value 0 denotes it does not. Default is 0.</p> <p>Type and dimension: int-scalar</p>
User	<p>The database user, in the context of which, the transactions are performed on the database.</p> <p>Type and dimension: string-scalar</p> <p><b>Note:</b> You must specify a value for this attribute if DetailMonitor is set to a non-zero value.</p>
UPword	<p>Encrypted password for the database user.</p> <p>See <a href="#">“Encrypting passwords for Sybase”</a> on page 35.</p> <p>Type and dimension: string-scalar</p> <p><b>Note:</b> You must specify a value for this attribute if DetailMonitor is set to a non-zero value. However, you need not specify a value for this attribute if the database user does not require a password.</p>
Db	<p>Name of the database used for detailed monitoring. The table used by the detail monitor script resides in this database.</p> <p>Type and dimension: string-scalar</p> <p><b>Note:</b> You must specify a value for this attribute if DetailMonitor is set to a non-zero value.</p>
Table	<p>Name of the table on which the detail monitoring script performs the transactions.</p> <p>Type and dimension: string-scalar</p> <p><b>Note:</b> You must specify a value for this attribute if DetailMonitor is set to a non-zero value.</p>
Monscript	<p>The path to the detail monitor script; the default value for this attribute is the path for the script, SqlTest.pl, provided with the agent.</p> <p>Type and dimension: string-scalar</p> <p><b>Note:</b> You must specify a value for this attribute if DetailMonitor is set to a non-zero value.</p>

# SybaseBk resource type

## Type definition for the SybaseBk agent

The resource type definition for the agent for Sybase is as follows.

HP-UX

```
type SybaseBk (  
    str Backupserver  
    str Owner  
    str Home  
    str Version  
    str Server  
    str SA  
    str SApwd  
    static str ArgList[] = { Backupserver, Owner, Home, Version,  
        Server, SA, SApwd }  
    static str AgentDirectory = "/opt/VRTSagents/ha/bin/SybaseBk"  
)
```

## Attribute definitions for the SybaseBk agent

The SybaseBk resource has several required attributes.

[Table A-3](#) lists the required attributes for SybaseBk resource.

**Table A-3** Required attributes

Attributes	Definition
AgentDirectory	This attribute is for internal use only.  Specifies the location of the binaries, scripts, and other files that are related to the agent for SybaseBk. Symantec recommends not to modify the value of this attribute.  Type and dimension: static-string
Server	The \$DSQUERY Backup server name.  Type and dimension: string-scalar

**Table A-3** Required attributes (*continued*)

Attributes	Definition
Owner	<p>Sybase user as the defined owner of executables and database files in any of the sources (such as NIS+, /etc/hosts, and so on) specified in the /etc/nsswitch.conf file for passwd entry. The Sybase executables and database files are accessed in the context of this user.</p> <p>Type and dimension: string-scalar</p>
Home	<p>The \$SYBASE path to Sybase binaries and configuration files.</p> <p>Type and dimension: string-scalar</p>
Version	<p>Version of Sybase Backup Server.</p> <p>Type and dimension: string-scalar</p>
Backupserver	<p>The \$BACKUP SYBASE Backup Server name.</p> <p>Type and dimension: string-scalar</p>
SA	<p>Sybase database administrator. This attribute is required to connect to the ASE for shutdown.</p> <p>Type and dimension: string-scalar</p>
SAPswd	<p>Encrypted password of Sybase database administrator. This password is required to connect to the ASE for shutdown.</p> <p>Type and dimension: string-scalar</p> <p>See <a href="#">“Encrypting passwords for Sybase”</a> on page 35.</p> <p><b>Note:</b> You need not specify a value for this attribute if the SA user does not require a password.</p>



# Sample configurations for Sybase

This appendix includes the following topics:

- [About the sample configuration for the Sybase agent](#)
- [Resource dependency graph for the Sybase agent](#)
- [Sample configuration for a Sybase service group using LVM on HP-UX systems](#)
- [Sample configuration for a Sybase service group using VxVM on HP-UX systems](#)


## About the sample configuration for the Sybase agent

This appendix describes a typical service group that is configured to monitor the state of Sybase servers in a VCS cluster. The sample configuration graphically depicts the resource types, resources, and resource dependencies within the service group. Review these dependencies carefully before you configure the agent. For more information about these resource types, see the *Veritas Cluster Server Bundled Agents Reference Guide*.

## Resource dependency graph for the Sybase agent

[Figure B-1](#) illustrates the configuration's dependency graph for HP-UX.

Figure B-1 Dependency graph

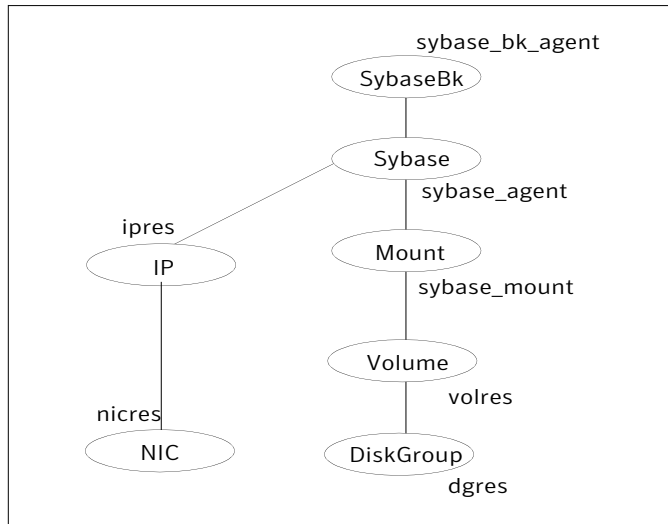

The dependency graph depicts a single Sybase instance configuration. The configuration contains a disk group with a single volume. The volume is monitored using a Volume resource and mounted using a Mount resource. The Mount resource requires Volume resource, which in turn requires the DiskGroup resource. The service group IP address for Sybase server is monitored using the IP and NIC resource types. The Sybase server can be started after each of these resources are brought online. The Backup Server is started after the Sybase SQL Server is online.

---

**Note:** If your configuration does not use Veritas Volume Manager, use the LVMVolumeGroup and LVMLogicalVolume resource types to configure shared storage instead of DiskGroup and Volume resource types.

---

## Sample configuration for a Sybase service group using LVM on HP-UX systems

The following sample shows a configuration for a service group using LVM for HP-UX systems.

```
include "types.cf"
include "/etc/VRTSagents/ha/conf/Sybase/SybaseTypes.cf"

cluster vcscluster (
```

**Sample configuration for a Sybase service group using LVM on HP-UX systems**

```

        UserNames = { admin = ThiAhcHeiDiiGqiChf }
        Administrators = { admin }
        CredRenewFrequency = 0
        CounterInterval = 5
    )

system system1 (
)

system system2 (
)

group Sybase_group(
SystemList = { system1 = 0, system2 = 1 }
AutoStartList = { system1,system2 }
)

IP ipres (
    Device = lan0
    Address = "16.9.1.9"
    NetMask = "255.255.0.0"
)

Mount sybase_mount (
    MountPoint = "/sybase_mnt"
    BlockDevice = "/dev/vg03/sybase"
    FSType = vxfs
    MountOpt = rw
    FsckOpt = "-n"
)

NIC nicres (
    Device = lan0
    NetworkHosts = { "16.9.10.1", "16.9.10.2" }
)

Sybase sybase_agent (
    Server = SYBASE_SERVER
    Owner = sybase
    Home = "/sybase_mnt/IA"
    Version = "12.5.2"
    SA = sa
    SApwd= ""

```

```
User = vcsuser
UPword = "jxpVmxMvrXjxKvk"
Db = vcsdb
Table = vcstable
Monscript = "/opt/VRTSagents/ha/bin/Sybase/SqlTest.pl"
DetailMonitor = 1
)

SybaseBk sybase_bk_agent (
  Server = SYBASE_SERVER
  Owner = sybase
  Home= "/sybase_mnt/IA"
  Version= "12.5.2"
  Backupserver = SYBASE_SERVER_BS
  SA = sa
  SApwd = ""
)

LVMLogicalVolume lvolres (
  LogicalVolume = sybase
  VolumeGroup = vg03
)

LVMVolumeGroup lvgres (
  VolumeGroup = vg03
)

lvolres requires lvgres
sybase_mount requires lvolres
ipres requires nicres
sybase_agent requires ipres
sybase_agent requires sybase_mount
sybase_bk_agent requires sybase_agent
```

## Sample configuration for a Sybase service group using VxVM on HP-UX systems

The following sample shows a configuration for a service group using VxVM for HP-UX systems.

```
include "types.cf"
include "/etc/VRTSagents/ha/conf/Sybase/SybaseTypes.cf"
```

```

cluster myslcluster (
    UserNames = {admin = anoGniNkoJooMwoInl,
                "root@system1.veritas.com" = en,
                "root@system2.veritas.com" = en }
    Administrators = { admin, "root@system1.veritas.com",
                    "root@system2.veritas.com" }
    SecureClus = 1
    CredRenewFrequency = 0
    CounterInterval = 5
)

system system1 (
)

system system2 (
)

group Sybase_group(
SystemList = { system1 = 0, system2 = 1 }
AutoStartList = { system1,system2 }
)

IP ipres (
    Device = lan0
    Address = "16.9.1.9"
    NetMask = "255.255.0.0"
)

Mount sybase_mount (
    MountPoint = "/sybase_mnt"
    BlockDevice = "/dev/vx/dsk/sybasedg/sybase_vol"
    FSType = vxfs
    MountOpt = rw
    FsckOpt = "-n"
)

NIC nicres (
    Device = lan0
    NetworkHosts = { "16.9.10.1", "16.9.10.2" }
)

Sybase sybase_agent (
    Server = SYBASE_SERVER
)

```

```
Owner = sybase
Home= "/sybase_mnt/IA"
Version = "12.5.2"
SA = sa
SApswd= ""
User = vcsuser
UPword = "jxpVmxMvrXjxKvk"
Db = "vcldb"
Table ="vcstable"
Monscript = "/opt/VRTSagents/ha/bin/Sybase/SqlTest.pl"
DetailMonitor = 1
)

SybaseBk sybase_bk_agent (
  Server = SYBASE_SERVER
  Owner = sybase
  Home = "/sybase_mnt/IA"
  Version = "12.5.2"
  Backupserver = SYBASE_SERVER_BS
  SA = sa
  SApswd = ""
)

DiskGroup dgres (
  DiskGroup = sybasedg
)

Volume volres (
  Volume= sybase_vol
  DiskGroup=sybasedg
)

volres requires dgres
sybase_mount requires volres
ipres requires nicres
sybase_agent requires ipres
sybase_agent requires sybase_mount
sybase_bk_agent requires sybase_agent

group VxSS (
  SystemList = { system1 = 0, system2 = 1 }
  Parallel = 1
  OnlineRetryLimit = 3
```

**Sample configuration for a Sybase service group using VxVM on HP-UX systems**

```
OnlineRetryInterval = 120
)

Phantom phantom_vxss (
)

ProcessOnOnly vxatd (
    IgnoreArgs = 1
    PathName = "/opt/VRTSat/bin/vxatd"
)
```





# Index

## Symbols

\$SYBASE 18

## A

agent for Backup server  
    functions 11  
    resource type 47  
    type definition 47  
agent for SQL server  
    attribute definitions 44  
    functions 11  
    resource type 43  
    type definition 43

## B

Backup server agent attributes  
    AgentDirectory 47  
    Backupserver 48  
    home 48  
    owner 48  
    SA 48  
    SApswd 48  
    server 47  
    version 48

## C

cluster manager 31  
commands  
    hagrp 26  
    hagui 30  
configuration  
    typical setup 14  
configuration wizard 31  
configuring service groups 31  
    about 31  
    cluster manager (Java Console) 31  
    command line 33  
    prerequisites 31

## D

database dbspaces 18  
detail monitoring  
    disabling 37  
    enabling 36

## H

hagrp command 26  
hagui command 30

## I

installing Sybase 21

## M

monitoring  
    basic 13  
    detail 13

## R

removing Sybase agent 25

## S

sample configuration  
    service group using LVM HP-UX 50  
    service group using VxVM HP-UX 52  
service group  
    viewing log 41  
SQL server agent attributes  
    AgentDirectory 45  
    Db 46  
    DetailMonitor 46  
    home 45  
    monsript 46  
    owner 45  
    SA 45  
    SApswd 45  
    server 44  
    table 46  
    UPword 46

SQL server agent attributes *(continued)*

user 46

version 45

supported software 10

## Sybase

database dbspaces 18

directory on shared disks 18

installation directory 17

installation prerequisites 17

installing 21

language settings 18

setting up for detail monitoring 19

transparent TCP/IP failover 18

## Sybase agent

about 9

agent functions 10

configuring using cluster manager 31

configuring using command line 33

detail monitoring 35

disabling 25

installation prerequisites 23

installing 24

monitoring options 13

removing 25

supported software 10

typical setup 14

uninstalling 25

upgrading 26

## SybaseTypes.cf file

importing 30

**T**

transparent TCP/IP failover 18

type definition 44

**U**

uninstalling Sybase agent 25