

Symantec™ ApplicationHA Agent for Microsoft SQL Server 2008 and 2008 R2 Configuration Guide

Windows on VMware

6.1

Symantec™ ApplicationHA Agent for Microsoft SQL Server 2008 Configuration Guide

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Product version: 6.1

Document version: 6.1 Rev 0

Legal Notice

Copyright © 2014 Symantec Corporation. All rights reserved.

Symantec, the Symantec Logo, the Checkmark Logo, Veritas, Veritas Storage Foundation, CommandCentral, NetBackup, Enterprise Vault, and LiveUpdate are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, "Rights in Commercial Computer Software or Commercial Computer Software Documentation", as applicable, and any successor regulations, whether delivered by Symantec as on premises or hosted services. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Symantec Corporation
350 Ellis Street
Mountain View, CA 94043

<http://www.symantec.com>

Technical Support

Symantec Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within Symantec to answer your questions in a timely fashion. For example, the Technical Support group works with Product Engineering and Symantec Security Response to provide alerting services and virus definition updates.

Symantec's support offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and/or Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers software upgrades
- Global support purchased on a regional business hours or 24 hours a day, 7 days a week basis
- Premium service offerings that include Account Management Services

For information about Symantec's support offerings, you can visit our website at the following URL:

www.symantec.com/business/support/index.jsp

All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policy.

Contacting Technical Support

Customers with a current support agreement may access Technical Support information at the following URL:

www.symantec.com/business/support/contact_techsupp_static.jsp

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level
- Hardware information

- Available memory, disk space, and NIC information
- Operating system
- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
 - Error messages and log files
 - Troubleshooting that was performed before contacting Symantec
 - Recent software configuration changes and network changes

Licensing and registration

If your Symantec product requires registration or a license key, access our technical support Web page at the following URL:

www.symantec.com/business/support/

Customer service

Customer service information is available at the following URL:

www.symantec.com/business/support/

Customer Service is available to assist with non-technical questions, such as the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and support contracts
- Information about the Symantec Buying Programs
- Advice about Symantec's technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs or manuals

Support agreement resources

If you want to contact Symantec regarding an existing support agreement, please contact the support agreement administration team for your region as follows:

Asia-Pacific and Japan customercare_apac@symantec.com

Europe, Middle-East, and Africa semea@symantec.com

North America and Latin America supportsolutions@symantec.com

Documentation

Your feedback on product documentation is important to us. Send suggestions for improvements and reports on errors or omissions. Include the title and document version (located on the second page), and chapter and section titles of the text on which you are reporting. Send feedback to:

doc_feedback@symantec.com

For information regarding the latest HOWTO articles, documentation updates, or to ask a question regarding product documentation, visit the Storage and Clustering Documentation forum on Symantec Connect.

<https://www-secure.symantec.com/connect/storage-management/forums/storage-and-clustering-documentation>

About Symantec Connect

Symantec Connect is the peer-to-peer technical community site for Symantec's enterprise customers. Participants can connect and share information with other product users, including creating forum posts, articles, videos, downloads, blogs and suggesting ideas, as well as interact with Symantec product teams and Technical Support. Content is rated by the community, and members receive reward points for their contributions.

<http://www.symantec.com/connect/storage-management>

Contents

Technical Support	4	
Chapter 1	Introducing the Symantec ApplicationHA agents for Microsoft SQL Server 2008 and 2008	
	R2	9
	About the Symantec ApplicationHA agents	9
	About intelligent monitoring framework	10
	How IMF works	11
	About the Symantec ApplicationHA agents for SQL Server 2008	11
	About the SQL Server 2008 Database Engine agent	12
	SQL Server 2008 Database Engine agent functions	12
	SQL Server 2008 Database Engine agent resource type definition	12
	SQL Server 2008 Database Engine agent attributes	13
	About the SQL Server 2008 FILESTREAM agent	16
	SQL Server 2008 FILESTREAM agent functions	16
	SQL Server 2008 FILESTREAM agent resource type definition	16
	SQL Server 2008 FILESTREAM agent attributes	17
	How Symantec ApplicationHA agents monitor SQL Server 2008	17
Chapter 2	Configuring application monitoring with Symantec ApplicationHA	19
	About configuring application monitoring with Symantec ApplicationHA	19
	Before configuring application monitoring	20
	Configuring application monitoring for SQL Server 2008	22
	Configuring detail monitoring for SQL Server 2008 using the command line	26
	Administering application monitoring using the Symantec High Availability tab	29
	To configure or unconfigure application monitoring	30
	To view the status of configured applications	30
	To start or stop applications	32

To enable or disable application heartbeat	32
To suspend or resume application monitoring	33

Introducing the Symantec ApplicationHA agents for Microsoft SQL Server 2008 and 2008 R2

This chapter includes the following topics:

- [About the Symantec ApplicationHA agents](#)
- [About intelligent monitoring framework](#)
- [About the Symantec ApplicationHA agents for SQL Server 2008](#)
- [About the SQL Server 2008 Database Engine agent](#)
- [About the SQL Server 2008 FILESTREAM agent](#)
- [How Symantec ApplicationHA agents monitor SQL Server 2008](#)

About the Symantec ApplicationHA agents

Agents are the processes that manage applications and resources of the predefined resource types which are configured for applications and components on a system. The agents are installed when you install Symantec ApplicationHA. These agents start, stop, and monitor the corresponding resources that are configured for the applications and report state changes.

Symantec ApplicationHA agents are classified as follows:

- Infrastructure agents

Infrastructure agents are packaged (bundled) with the base software and include agents for mount points, generic services, and processes. These agents are immediately available for use after you install Symantec ApplicationHA.

For more details about the infrastructure agents, refer to the *Symantec™ ApplicationHA Generic Agents Guide*.

- Application agents

Application agents are used to monitor third party applications such as Oracle, Microsoft SQL Server, and Microsoft Exchange. These agents are packaged separately and are available in the form of an agent pack that gets installed when you install Symantec ApplicationHA.

An agent pack is released on a quarterly basis. The agent pack includes support for new applications as well as fixes and enhancements to existing agents. You can install the agent pack on an existing ApplicationHA guest components installation.

Refer to the Symantec Operations Readiness Tools (SORT) Web site for information on the latest agent pack availability.

<https://sort.symantec.com>

The following sections provide details about the agent for Microsoft SQL Server 2008.

For more details about other application agents, refer to the application-specific configuration guide.

About intelligent monitoring framework

ApplicationHA provides Intelligent Monitoring Framework (IMF) to determine the status of the configured application and its components. IMF employs an event-based monitoring framework that is implemented using custom as well as native operating system-based notification mechanisms.

IMF provides instantaneous state change notifications. ApplicationHA agents detect this state change and then trigger the necessary actions.

IMF provides the following key benefits:

- Instantaneous notification
Faster fault detection resulting in faster fail over and thus less application down time.
- Ability to monitor large number of components
With reduced CPU consumption, IMF effectively monitors a large number of components.
- Reduction in system resource utilization

Reduced CPU utilization by ApplicationHA agent processes when number of components being monitored is high. This provides significant performance benefits in terms of system resource utilization.

How IMF works

The following steps outline how IMF-based monitoring works:

1. When IMF is enabled, the ApplicationHA agent waits for the components to report the same steady state (whether online or offline) for two consecutive monitor cycles and then registers the components for IMF-based monitoring.
2. The agent then registers itself for receiving specific custom or operating system specific event notifications.
3. In case of an application failure, the agent determines the affected component and then executes a monitor cycle for that component. The monitor cycle determines the component status. If the component state is offline, then ApplicationHA takes the necessary corrective action, depending on the configuration.
4. If the component state remains the same, then the agent moves to a wait state and then waits for the next event to occur.

About the Symantec ApplicationHA agents for SQL Server 2008

The Symantec ApplicationHA agents for Microsoft SQL Server 2008 provide monitoring support for the following SQL Server versions:

- Microsoft SQL Server 2008
- Microsoft SQL Server 2008 SP1
- Microsoft SQL Server 2008 R2
- Microsoft SQL Server 2008 R2 SP1

The agents monitor the SQL Server databases and the associated services on the virtual machine.

The SQL Server 2008 agents include the following:

- **SQL Server 2008 Database Engine agent**
Provides monitoring for SQL Server Database Engine service. The agent monitors the status of the service and if the service is not running, the agent declares the service resource as offline.
See [“About the SQL Server 2008 Database Engine agent”](#) on page 12.

- SQL Server 2008 FILESTREAM agent**
 Provides monitoring for SQL Server FILESTREAM component. The agent monitors the Windows FILESTREAM configuration settings for the SQL Server instance.
 See [“About the SQL Server 2008 FILESTREAM agent”](#) on page 16.

About the SQL Server 2008 Database Engine agent

The Symantec ApplicationHA SQL Server 2008 Database Engine agent monitors the Database Engine service. The agent brings the service online, monitors the status, and takes it offline. If the service is not running, the agent declares the state as offline.

If detail monitoring is configured, the agent checks the health of critical SQL databases or executes a monitoring script. If detail monitoring is successful, the agent declares the application as available.

This agent is represented by the SQLServer2008 resource type.

SQL Server 2008 Database Engine agent functions

Online	Brings the SQL Server 2008 service online.
Offline	Takes the SQL Server 2008 service offline.
Monitor	Queries the Service Control Manager (SCM) for the status of SQL Server 2008 services. Also, if detail monitoring is configured, the agent performs a database health check depending on the configuration.
Clean	Forcibly stops the SQL Server service.

SQL Server 2008 Database Engine agent resource type definition

```

type SQLServer2008 (
  static int IMF{} = { Mode=3, MonitorFreq=5, RegisterRetryLimit=3 }
  static il8nstr ArgList[] = { Instance,
    "LanmanResName:VirtualName",SQLOnlineTimeout,
    SQLOfflineTimeout, DetailMonitorInterval,
    SQLDetailMonitorTimeout, Username, Domain, Password, DBList,
    SQLFile, FaultOnDMFailure, "LanmanResName:IPResName",
    SQLClusterAccount }
  str Instance
  str LanmanResName
  int SQLOnlineTimeout = 90

```

```
int SQLOfflineTimeout = 90
int DetailMonitorInterval
int SQLDetailMonitorTimeout = 30
i18nstr Username
i18nstr Domain
str Password
i18nstr DBList[]
i18nstr SQLFile
boolean FaultOnDMFailure = 1
str SQLClusterAccount
)
```

SQL Server 2008 Database Engine agent attributes

[Table 1-1](#) describes the SQL Server 2008 Database Engine required attributes.

Table 1-1 SQL Server 2008 Database Engine required attributes

Required attributes	Description
Instance	Name of the SQL Server instance to monitor. If the attribute is blank the agent monitors the default instance (MSSQLSERVER). Type and dimension: string-scalar
LanmanResName	This attribute is not applicable for Symantec ApplicationHA.
SQLOnlineTimeout	Number of seconds that can elapse before the agent online function aborts. Default = 90 Type and dimension: integer-scalar
SQLOfflineTimeout	Number of seconds that can elapse before the agent offline function aborts. Default = 90 Type and dimension: integer-scalar

[Table 1-2](#) describes the SQL Server 2008 Database Engine optional attributes.

Table 1-2 SQL Server 2008 Database Engine optional attributes

Optional attributes	Description
DetailMonitorInterval	<p>Defines whether the agent performs detail monitoring of SQL Server.</p> <p>The default value 0 means that the agent does not monitor SQL Server in detail.</p> <p>A non-zero value indicates the number of online monitor cycles that the agent must wait before performing detail monitoring. Symantec recommends that you set this value to between 1 and 12.</p> <p>The numeric value specifies how often the monitoring check must run. 1 means, run a detail check every single monitor interval, 2 means run the detail check every second monitor interval. This interpretation may be extended to other values.</p> <p>Note: If this attribute is set to a non-zero value, then the following attributes must be assigned appropriate values:</p> <p>For script-based monitoring: SQLFile, Username, Password, Domain, and SQLDetailMonitorTimeOut</p> <p>For databases list based monitoring: DBList</p> <p>Default: 5</p> <p>Type and dimension: integer-scalar</p>
FaultOnDMFailure	<p>Defines whether the agent faults the SQL Server resource if the detail monitoring fails.</p> <p>If the value is set to True, the agent faults the configured SQL Server resource if detail monitoring fails. In such a case, the SQL Server resource may go into offline state.</p> <p>If the value is set to False, the agent does not fault the SQL Server resource if detail monitoring fails. In such a case, the SQL Server resource may go into the unknown state.</p> <p>Note: The value set gets operational only after the SQL Server resource under consideration comes online.</p> <p>Default = True</p> <p>Type and dimension: boolean</p>

Table 1-2 SQL Server 2008 Database Engine optional attributes (*continued*)

Optional attributes	Description
SQLDetailMonitor Timeout	<p>Number of seconds that can elapse before script-based detail monitor routine aborts.</p> <p>Default = 30</p> <p>Type and dimension: integer-scalar</p>
Username	<p>The user account in whose context the script-based detail monitoring is performed. The agent uses this account context to run the SQL script for detail monitoring.</p> <p>This attribute must not be null if DetailMonitorInterval attribute is set to a non-zero value and script-based detail monitoring is configured.</p> <p>Note: This attribute can take localized values.</p> <p>Type and dimension: string-scalar</p>
Domain	<p>Domain of the user account specified in the Username attribute.</p> <p>Note: This attribute can take localized values.</p> <p>Type and dimension: string-scalar</p>
Password	<p>Password for the user account specified in the Username attribute.</p> <p>Type and dimension: string-scalar</p>
SQLFile	<p>The location of the SQL file executed during a monitor cycle. This attribute must not be null if script-based detail monitoring is configured and the DetailMonitorInterval attribute is set to a non-zero value.</p> <p>This attribute is related only to script-based Detail Monitoring. This attribute can be null if DBList based detail monitoring is configured.</p> <p>Note that if both script-based (SQLFile attribute) and databases list based (DBList attribute) detail monitoring are configured, then the DBList attribute takes precedence. The agent performs databases list based (DBList attribute) detail monitoring.</p> <p>Note: This attribute can take localized values.</p> <p>Type and dimension: string-scalar</p>

Table 1-2 SQL Server 2008 Database Engine optional attributes (*continued*)

Optional attributes	Description
DBList	<p>List of databases for which the agent will perform detail monitoring.</p> <p>Note that if both script-based (SQLFile attribute) and databases list based (DBList attribute) detail monitoring are configured, then the DBList attribute takes precedence. The agent performs databases list based (DBList attribute) detail monitoring.</p> <p>Note: This attribute can take localized values.</p> <p>Type and dimension: string-vector</p>
SQLClusterAccount	This attribute is not applicable for Symantec ApplicationHA.

About the SQL Server 2008 FILESTREAM agent

The Symantec ApplicationHA agent for SQL Server 2008 FILESTREAM enables FILESTREAM for the specified SQL Server instance, monitors its status, and disables it.

FILESTREAM in SQL Server enables SQL Server-based applications to store unstructured data, such as documents and images, on the file system.

This agent is represented by the FILESTREEAM resource type.

SQL Server 2008 FILESTREAM agent functions

Online	Enables FILESTREAM on the system.
Offline	Disables FILESTREAM on the system.
Monitor	Monitors FILESTREAM status on the system. If the agent is unable to query the status of FILESTREAM or if FILESTREAM is disabled on the system, the FILESTREAM resource in the service group faults.
Clean	Forcibly stops the configured FILESTREAM services.

SQL Server 2008 FILESTREAM agent resource type definition

```

type SQLFilestream (
  static i18nstr ArgList[] = { InstanceName }
  i18nstr InstanceName
)

```


SQL Server 2008 FILESTREAM agent attributes

Table 1-3 describes the SQL Server 2008 FILESTREAM required attribute.

Table 1-3 SQL Server 2008 FILESTREAM required attribute

Required attribute	Description
InstanceName	Name of the SQL Server instance to which the FILESTREAM is bound. If the attribute is blank the agent monitors the default instance (MSSQLSERVER). Type and dimension: string-scalar

How Symantec ApplicationHA agents monitor SQL Server 2008

The SQL Server 2008 agents monitor the configured resources, determine the status of these resources, bring them online, and take them offline. The agents detect an application failure if the configured SQL Server instance or associated services become unavailable. The agents try to start the application services for a configurable number of attempts. If the application services fail to start, the agents consider this as an application failure and report the status to VMware HA. Depending on the configuration, VMware HA can then restart the virtual machine. After the computer restarts, the agents start the application services and bring the configured resources online on the system.

The agent provides the following levels of monitoring support:

- **Basic monitoring**
In the basic level monitoring, the agent monitors and determines if the configured resources are online and the corresponding SQL Server instance and associated services are running.
- **Detail monitoring**
In detail monitoring, the agent runs a user defined SQL script or connects to the database to verify the status of SQL instances. It detects an application failure if the monitoring routine reports an improper function of the SQL instance processes.

Following exit codes highlight if the database is up and functional:

Exit code	Status
0	Online

Any other Depending on the FaultOnDMFailure attribute value set, the resource may go into Offline or Unknown state.

 If the value is set to True, the SQL Server resource may go into offline state.

 If the value is set to False, the SQL Server resource may go into the unknown state.

You can configure detail monitoring in either of the following ways:

- Follow the wizard steps while you configure application monitoring
See [“Configuring application monitoring for SQL Server 2008”](#) on page 22.
- Set the detail monitoring attributes and configure it using the command line
See [“Configuring detail monitoring for SQL Server 2008 using the command line”](#) on page 26.

Configuring application monitoring with Symantec ApplicationHA

This chapter includes the following topics:

- [About configuring application monitoring with Symantec ApplicationHA](#)
- [Before configuring application monitoring](#)
- [Configuring application monitoring for SQL Server 2008](#)
- [Administering application monitoring using the Symantec High Availability tab](#)

About configuring application monitoring with Symantec ApplicationHA

This chapter describes the steps to configure application monitoring for Microsoft SQL Server 2008 or Microsoft SQL Server 2008 R2 with Symantec ApplicationHA in a VMware virtualization environment.

Consider the following before you proceed:

- You can configure application monitoring on a virtual machine using the Symantec ApplicationHA Configuration Wizard. The wizard is launched when you click **Configure Application Monitoring** on the Symantec High Availability tab in VMware vSphere Client.
- Apart from the Symantec ApplicationHA Configuration Wizard, you can also configure application monitoring using the Veritas Cluster Server (VCS) commands. For more information, refer to the following Technote:

<http://www.symantec.com/docs/TECH159846>

- Symantec recommends that you first configure application monitoring using the wizard before using VCS commands to add additional components or modify the existing configuration.
Apart from the application monitoring configuration, the wizard also sets up the other components required for Symantec ApplicationHA to successfully monitor the applications.
- You can use the wizard to configure monitoring for only one application per virtual machine.
To configure another application using the wizard, you must first unconfigure the existing application monitoring configuration. Or, you can use the command-line interface (CLI) to configure more than one applications.
- After configuring SQL Server 2008 databases for monitoring, if you create another database or service, then these new components are not monitored as part of the existing configuration.
In this case, you can either use the VCS commands to add the components to the configuration or unconfigure the existing configuration and then run the wizard again to configure the required components.

Note: When you configure or unconfigure application monitoring, it does not affect the state of the application. The application runs unaffected on the virtual machine. This also does not require any additional steps on the vCenter Server.

- If a configured application fails, Symantec ApplicationHA attempts to start the application on the computer. If the application does not start, Symantec ApplicationHA communicates with VMware HA to take corrective action. Symantec ApplicationHA tries to stop the other configured applications in a predefined order before communicating with VMware HA. This avoids the other applications from getting corrupted due to a computer restart.
A single failed application can bring down other healthy applications running on the virtual machine. You must take this behavior into consideration while configuring application monitoring on a virtual machine.

Before configuring application monitoring

Note the following prerequisites before configuring application monitoring for SQL Server 2008 on a virtual machine:

- Verify that you have installed Symantec ApplicationHA in your VMware environment.

For information about installing Symantec ApplicationHA, refer to the *Symantec™ ApplicationHA Installation and Upgrade Guide*.

- Verify that VMware Tools is installed on the virtual machine.
Install the version that is similar to or later than that available with VMware ESX 4.1.
- Verify that you have installed VMware vSphere Client. The vSphere Client is used to configure and control application monitoring.
You can also perform the application monitoring operations directly from a browser window using the following URL:

```
https://<virtualmachineNameorIPAddress>:5634/vcs/admin/
application_health.html?priv=ADMIN
```

Note: While using a browser to perform application monitoring operations, if the Symantec ApplicationHA version displayed in the application health view is not correct, it may be because older version information is cached by the browser. To correct this, clear the browser cache and try again. If this is also observed while using the vSphere Client, then re-launch the vSphere Client and try again.

- If the application data is stored on nested mount points, then it is required to set the dependency between these mount points. This enables ApplicationHA to monitor all the nested mount points.
To define the dependency between the nested mount points, you must set the value for MountDependsOn attribute of the MountMonitor agent. The value of this attribute must be specified as a key-value pair.
Where,
Key= mount path
Value= volume name
- Verify that you have installed SQL Server 2008 and the associated components (FILESTREAM, SQL Server Agent, Analysis Service) that you want to monitor on the virtual machine.
- Verify that the SQL Server instances that you want to configure for monitoring are running.
- If you have configured a firewall, ensure that your firewall settings allow access to ports used by Symantec ApplicationHA installer, wizard, and services.
For information about the ports that are used, refer to the *Symantec™ ApplicationHA Installation and Upgrade Guide*.
- If you are configuring application monitoring in a disaster recovery environment, ensure that you are using the VMware disaster recovery solution, VMware

vCenter Site Recovery Manager (SRM). For more information, refer to the *Symantec™ ApplicationHA User's Guide*.

Configuring application monitoring for SQL Server 2008

Perform the following steps to configure monitoring for SQL Server 2008 or SQL Server 2008 R2 on a virtual machine using the Symantec ApplicationHA Configuration Wizard.

Note: Symantec ApplicationHA does not support application monitoring for SQL Server 2008 and SQL Server 2008 R2 on the same virtual machine simultaneously.

To configure application monitoring for SQL Server 2008

- 1 Launch the vSphere Client and connect to the vCenter Server that manages the virtual machine.
- 2 From the vSphere Server's Inventory view in the left pane, select the virtual machine where you want to configure application monitoring, and then in the right pane select the **Symantec High Availability** tab.
- 3 Skip this step if you have already configured the single sign-on during the guest installation.

On the Symantec High Availability tab, specify the credentials of a user account that has administrative privileges on the virtual machine and then click **Configure**. The Symantec High Availability Console sets up a permanent authentication for the user account.

For more information about single sign-on, refer to the *Symantec™ ApplicationHA User's Guide*.

After the authentication is successful, the Symantec High Availability tab refreshes and displays the application health view.

- 4 Click **Configure Application Monitoring** to launch the Symantec ApplicationHA Configuration Wizard.
- 5 Review the information on the Welcome panel and then click **Next**.

- 6 On the Application Selection panel, click **Microsoft SQL Server 2008** in the Supported Applications list.

You can use the Search box to find the application and then click **Next**.

If you want to download any of the Symantec ApplicationHA agents, click the **Download Application Agents (SORT)** link to download the agents from the Symantec Operations Readiness Tools (SORT) site.

Select this option even if you want to configure Microsoft SQL Server 2008 R2.

- On the SQL Instance Selection panel, choose the SQL Server instances and the associated components that you want to monitor and then click **Next**.

Instances Select the SQL Server instances to monitor.

SQL Agent Service Select **SQL Agent Service** to configure monitoring for SQL Server 2008 Agent service for the selected instance.

You must select this for each selected SQL Server instance separately.

Analysis Service Select **Analysis Service** to configure monitoring for SQL Server 2008 Analysis service for the selected instance.

You must select this for each selected SQL Server instance separately.

FILESTREAM The **FILESTREAM** check box cannot be selected.

If FILESTREAM is enabled on the computer, this option is selected by default.

- To enable detail monitoring for the selected instances and associated services, select **Configure detail monitoring** and provide the following required details:

- Enter a non-zero value in the **Monitor after every ... cycles** box. This value indicates the number of online monitor cycles that the agent must wait before performing detail monitoring.

The numeric value specifies how often the monitoring check must run. 1 means, run a detail check every single monitor interval, 2 means run the detail check every second monitor interval. This interpretation may be extended to other values.

Symantec recommends that you set this value between 1 and 12. The default value is 5.

- Select one of the following mode for detail monitoring.

- **Database monitoring**

Select this mode to enable detail monitoring by connecting to the database and choose the desired databases from the **Databases** list.

- **Script-based monitoring**

Select this mode to enable detail monitoring by using a user defined SQL script.

Enter the following details, if you choose script-based monitoring as the mode for detail monitoring.

Script Path Enter the script location on the virtual machine

User Name Enter the valid user name

Note: The user account must have rights to run the script and execute the SQL commands specified in the script.

Password Enter the password for the user account

- Select **Restart the SQL instance if detail monitoring fails** if you want the agent to detect an application failure in case detail monitoring has failed.

- 9 On the ApplicationHA Configuration panel, the wizard performs the application monitoring configuration tasks, creates the required resources, and enables the application heartbeat that communicates with VMware HA.

The panel displays the status of each task. After all the tasks are complete, click **Next**.

If the configuration tasks fail, click **View Logs** to check the details of the failure. Rectify the cause of the failure and run the wizard again to configure the application monitoring.

- 10 On the Finish panel, click **Finish** to complete the wizard.

This completes the application monitoring configuration. You can view the application status in the Symantec High Availability tab.

The view displays the application as configured and running on the virtual machine. The Description box displays the details of the configured components.

If the application status shows as not running, click **Start Application** to start the configured components on the computer.

Configuring detail monitoring for SQL Server 2008 using the command line

You can configure the Symantec ApplicationHA SQL agents to perform detail monitoring of the configured SQL instances by defining the DetailMonitorInterval, SQLFile and DBList attributes from the command line.

Refer to the SQL Server agent attributes for more details.

See [“SQL Server 2008 Database Engine agent attributes”](#) on page 13.

Note: This procedure is optional. It is not essential for the functioning of application monitoring for the SQL Server instances.

Note the following before you proceed:

- If you want to configure detail monitoring, you must have a user account that has the permissions to log on to the respective SQL instance.
- If you want to use a script for detail monitoring, for example, to create a table and write data to it, note the location(s) of the script to use.

A sample script is supplied in the following directory:

```
%vcs_home%\bin\SQLServer2008\sample_script.sql
```

Here, %vcs_home% typically expands to C:\Program Files\Veritas\cluster server.

The same script can be used to monitor SQL Server 2008 and SQL Server 2008 R2.

- If you configure the DetailMonitor interval, then you must specify a value for the SQLFile or the DBList attribute.
If you set both the SQLFile and DBList attributes for detail monitoring, the DBList attribute takes precedence.
If you are specifying a script for detail monitoring, ensure that the script is accessible from the virtual machine.

To configure detail monitoring for SQL

- 1 From the Symantec High Availability tab in the vSphere Client, click **Stop Application**.

This stops the configured SQL instances on the virtual machine. This is required for the attribute changes to take effect.

- 2 On the virtual machine where you have configured the SQL instances, open the command prompt, and then perform the following steps. In each step, type the provided command, and then press **Enter**.

- 3 To set the configuration mode to read/write, type `haconf -makerw`.

- 4 To get the SQL Server agent resource name, type `hares -state`.

The output of this command displays the resources configured on the virtual machine.

The SQL Server resource name is of the format

```
SQLServer2008_<SQLinstancename>
```

Make a note of the SQL resource name as it is required in the subsequent steps.

- 5 To set the DetailMonitorInterval attribute of the SQL Server resource, type `hares -modify <resourcename> DetailMonitorInterval 5`.

Where, *<resourcename>* is the name of the SQL Server resource.

A non-zero value for the DetailMonitorInterval attribute enables detail monitoring. In this case, it indicates that the agent waits for 5 monitor cycles before performing the detail monitoring.

Symantec recommends that you set this value between 1 and 12.

- 6 To set up script-based detail monitoring, you need to modify the SQLFile attribute. To do so, type `hares -modify <resourcename> SQLFile "<scriptfilepath>"`.

Where, *<scriptfilepath>* is the full path of the script that you wish the agent to run as part of the detail monitoring. Enclose the path of the script in doublequotes.

- 7 To set up detail monitoring for specific databases, you need to set the DBList attribute. To do so, type `hares -modify <resourcename> DBList <database1><database2>`

Where, *<database1>* and *<database2>* are the names of the databases for which you want to configure detail monitoring.

In this mode, the agent monitors the health by connecting to the databases specified.

- 8 To set the Username attribute, type `hares -modify <resourcename> Username <username>`.

Where, *<username>* is the user account that has permissions to log on to the SQL Server.

- 9 You must now encrypt the password for the user that you specified in the earlier step.

Perform the following steps to encrypt the password:

- Type the following on the command prompt and press **Enter**:
`vcseencrypt -agent`
- Type the password when prompted.
- The output displays some characters. These represent the password in an encrypted form.
- Copy the encrypted password, which is required in the next step.

The password is encrypted using the VCSEncrypt utility. For more information, refer to the *Veritas Cluster Server 5.1 SP1 Administrator's Guide*.

- 10 To set the Password attribute, type `hares -modify <resourcename> Password <password>`.

Where, *<password>* is the encrypted password that you created in the previous step.

- 11 To set the Domain attribute, type `hares -modify <resourcename> Domain <domain>`.
Where, *<domain>* is the name of the domain to which the specified user belongs.
- 12 As required, use the `hares` command to modify other SQL Server agent attributes.
- 13 Save and close the configuration. To set the configuration mode to read-only, type `haconf -dump -makero`
- 14 From the Symantec High Availability tab in the vSphere Client, click **Start Application**.
The specified attributes take effect and Symantec ApplicationHA monitors the SQL Server instances using the configured parameters.

Administering application monitoring using the Symantec High Availability tab

Note: You can administer application monitoring in two ways. One, using the Symantec High Availability tab as described below and two, using the Symantec High Availability Dashboard. Using the Symantec High Availability dashboard, you can administer application monitoring in a graphical user interface (GUI). For information about the latter, refer to the *Symantec™ ApplicationHA User's Guide*.

Symantec ApplicationHA provides an interface, the Symantec High Availability tab, to configure and control application monitoring. The Symantec High Availability tab is integrated with the VMware vSphere Client.

Use the Symantec High Availability tab to perform the following tasks:

- configure and unconfigure application monitoring
- start and stop configured applications
- enable and disable application heartbeat
- enter and exit maintenance mode

Using the Symantec High Availability tab, you can also manage the Symantec ApplicationHA licenses by clicking the **Licenses** link. For more information, refer to the *Symantec™ ApplicationHA Installation and Upgrade Guide*.

To view the Symantec High Availability tab, launch the VMware vSphere Client, select a virtual machine from the Inventory pane, and in the Management pane on the right, click the **Symantec High Availability** tab.

If you have not configured single sign-on for the virtual machine, specify the user credentials of a user that has administrative privileges on the virtual machine.

You can also perform the application monitoring operations directly from a browser window using the following URL:

https://<VMNameorIPAddress>:5634/vcs/admin/application_health.html?priv=ADMIN

Note: While using a browser to perform application monitoring operations, if the Symantec ApplicationHA version displayed in the application health view is not correct, it may be because older version information is cached by the browser. To correct this, clear the browser cache and try again. If this is also observed while using the vSphere Client, then re-launch the vSphere Client and try again.

To configure or unconfigure application monitoring

Use the Symantec High Availability tab to configure or delete an application monitoring configuration from the virtual machine. This may be required in case you want to re-create the configuration or configure another application using the wizard.

You can use the following buttons:

- Click **Configure Application Monitoring** to launch the Symantec ApplicationHA Configuration Wizard. Use the wizard to configure application monitoring.
- Click **Unconfigure Application Monitoring** to delete the application monitoring configuration from the virtual machine.

Symantec ApplicationHA removes all the configured resources for the application and its services.


Note that this does not uninstall Symantec ApplicationHA from the virtual machine. This only removes the configuration. The unconfigure option removes all the application monitoring configuration resources from the virtual machine.

To monitor the application, you have to configure them again.

To view the status of configured applications

Note: To view applications at a component level and their dependencies, see the Component Dependency tab under the Symantec High Availability tab. For more information, refer to the *Symantec™ ApplicationHA User's Guide*.

Under the Symantec High Availability tab, the Component List tab displays the status of the configured application and the associated services.

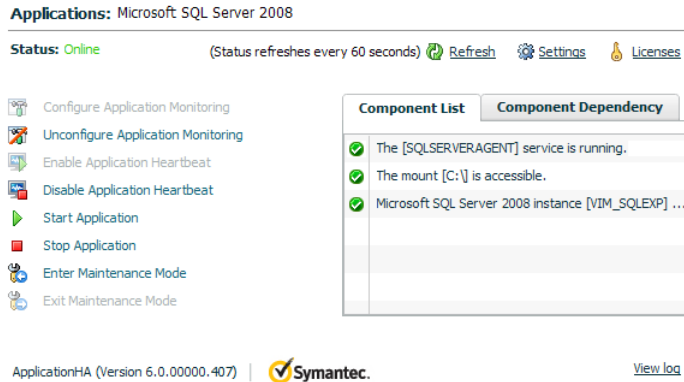

For example, if you have configured monitoring for SQL Server 2008, the Component List tab displays the following information:

The [service] service is running.

Microsoft SQL Server 2008 instance [instance] is running.

The mount [mount point] is accessible.

Where, *service*, *instance*, and *mount point* are, respectively, the names of the service configured on the virtual machine, SQL Server 2008 service, and mount point.

The Component List tab also displays the state of the configured application and its components. The following states are displayed:

- | | |
|---------|---|
| online | Indicates that the application and its services are running on the virtual machine. |
| offline | Indicates that the application and its associated services are not running on the virtual machine. |
| partial | Indicates that either the services are being started on the virtual machine or Symantec ApplicationHA was unable to start one or more of the configured application services. |
| faulted | Indicates that the configured services or components have unexpectedly stopped running. |

Click **Refresh** to see the most current status of the configured components. The status is refreshed every 60 seconds by default.

Click **Settings** to change ApplicationHA settings for the configured application and the virtual machine. For more information, refer to the *Symantec™ ApplicationHA User's Guide*.

To start or stop applications

Use the following options on the Symantec High Availability tab to control the status of the configured application and the associated components:

- Click **Start Application** to start a configured application. Symantec ApplicationHA attempts to start the configured application and its services in the required order. The configured resources are also brought online in the appropriate hierarchy.
- Click **Stop Application** to stop a configured application that is running on the virtual machine. Symantec ApplicationHA begins to stop the configured application and its services gracefully. The configured resources are also taken offline in the appropriate hierarchy.

To enable or disable application heartbeat

The VMware virtual machine monitoring feature uses the heartbeat information that VMware Tools captures as a proxy for guest operating system availability. This allows VMware HA to automatically reset or restart individual virtual machines that have lost their ability to send a heartbeat. You can select VM and Application Monitoring if you also want to enable application monitoring.

Symantec High Availability tab lets you control the application heartbeat on the virtual machines.

Use the following options on the Symantec High Availability tab to control the status of the configured application heartbeat:

- Click **Enable Application Heartbeat** to enable the heartbeat communication between the configured applications running on the virtual machine and VMware HA. The application heartbeat is enabled by default when an application is configured for monitoring.
- Click **Disable Application Heartbeat** to disable the heartbeat communication between the configured applications running on the virtual machine and VMware HA.

Disabling the application heartbeat does not instruct VMware HA to restart the virtual machine. This option disables the application monitoring feature in the VMware virtual machine monitoring settings.

To suspend or resume application monitoring

After configuring application monitoring you may want to perform routine maintenance tasks on those applications. These tasks may or may not involve stopping the application but may temporarily affect the state of the applications and its dependent components. If there is any change to the application status, Symantec ApplicationHA may try to restore the application state. This may potentially affect the maintenance tasks that you intend to perform on those applications.

If stopping the application is not an option, you can suspend application monitoring and create a window for performing such maintenance tasks. When application monitoring is suspended, ApplicationHA freezes the application configuration, disables the application heartbeat, and stops sending the heartbeat to VMware HA.

The Symantec High Availability tab provides the following options:

- Click **Enter Maintenance Mode** to suspend the application monitoring for the applications that are configured on the virtual machine. During the time the monitoring is suspended, Symantec ApplicationHA does not monitor the state of the application and its dependent components. The Symantec High Availability tab does not display the current status of the application. If there is any failure in the application or its components, ApplicationHA takes no action.
- Click **Exit Maintenance Mode** to resume the application monitoring for the applications configured on the virtual machine. You may have to click the **Refresh** link in the Symantec High Availability tab to see the current status of the application.

When application monitoring is restarted from a suspended state, ApplicationHA does not enable the application heartbeat. Click **Enable Application Heartbeat** to enable it.

If you have made changes that include database addition or change in the underlying storage mount point that was being monitored, then those changes may not reflect in the application monitoring configuration. In such cases, you may have to unconfigure and reconfigure the application monitoring.